





One Source for Precision Fibrous Parts

## HPB75 POLISHING MATERIAL

- DESCRIPTION:** White fiber based resin treated polyurethane pad for diverse polishing applications and surfaces. The fiber material makes excellent interconnecting cellular structures, which make the pad highly durable and dimensionally stable. This material is designed for rapid stock removal and superb surface finishes.
- FOR USE ON:** Hand Held Machines/Low to medium pressure applications
- DUROMETER:** Shore C Scale 40
- COMPRESSION %:** 2-4% (4 pound force displacement)
- DENSITY:** .37 g/cm<sup>3</sup>
- THICKNESS:** .090" and .150"
- DIAMETER:** Up to 53" Sheets or Pads
- SURFACE PREPARATION:** Plain, Perforated or Embossed.
- BACKINGS:** Easy Apply/Remove PSA is Standard. High Temperature PSA and Magnetic Backing are available.
- IMPREGNATIONS:** Abrasive Impregnates in limited styles.
- CAN REPLACE:** SUBA X or PELLON
- PERFORMANCE:** HPB75 offers equal polishing as our HPB60 pad for customers who want a slightly higher density and durometer.

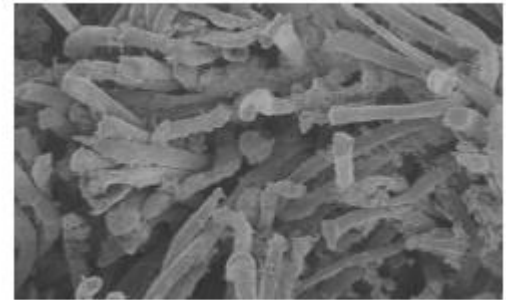

POLISHING COMPARISON

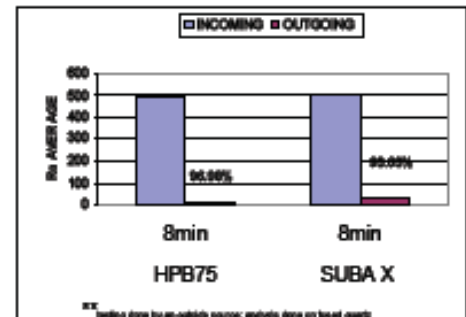

**SPARTAN FELT COMPANY**  
151 Felt Drive, Roebuck, SC 29376  
TEL: 864-576-7919  
www.spartanfelt.com  
e-mail: jwelry@spartanfelt.com

MANUFACTURERS OF PRECISION FELT PRODUCTS

